

# .100"X.100" (2.54mmX2.54mm) Center Dual Row PCB Header



## 2200 Series





### FEATURES:

- . 2200 Series 4-80 Circuits
- . .025"[0.64mm] Square wire pins
- . PBT+30% Glass Fiber [UL 94V-0]
- . Straight and right angle pins
- . P.C.Board and back planes

### SPECIFICATIONS:


- . Current rating: 3A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing  
/20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand voltage: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

UNIT: INCH  
MM

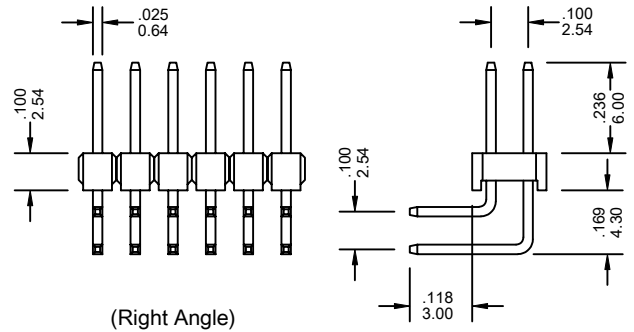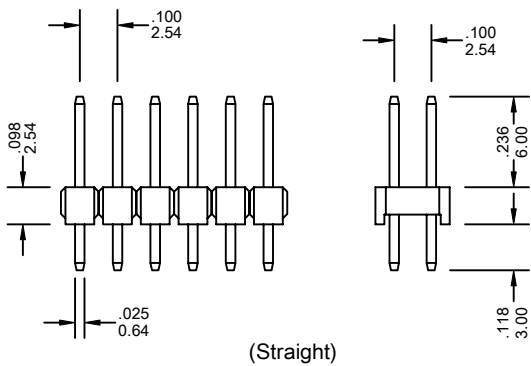

### Ordering Information 2200 Series

Series No.	No. of Contacts	Contact Type	Contact Plating	
2200	- 2X06P	S	G1	- PB
2200 Series	2X02P ~ 2X40P	S: Straight R: Right Angle	T: Tin G1: Gold Flash G5: 5u" Gold G10: 10u" Gold G15: 15u" Gold G30: 30u" Gold [G: Full Gold]	RoHs
* PIN LENGTH CAN BE CHANGED TO CUSTOM'S SPECIFICATION				



### Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
4	.200 5.08	.100 2.54	6	.300 7.62	.200 5.08	8	.400 10.16	.300 7.62
2200 Series * FOR CIRCUIT SIZES 10 THROUGH 80 ADD .100" OR 2.54MM FOR EACH ADDITIONAL PIN.								