

D-Subminiature Connector Crimp Terminal With Male And Female Type



DT Series (Plug and Socket)

FEATURES:

- . Pin diameter: 1.0mm
- . Available in a choice of platings
- . Should be combined with DCH series
- . PIN with incessant or divergent type

MATERIALS:

- . Contacts: Phosphor Bronze. (Socket)
- . : Brass (Plug)

ELECTRICAL CHARACTERISTICS:

- . Test with DCH Series
- . Current rating: 5 Amperes
- . Withstanding Voltage: AC 1250V r.m.s
- . Insulation Resistance: 5000 Megohms Minimum at DC 500V
- . Contact Resistance: 5 Milliohms Maximum
- . Operation Temperature: -55°C ~ +105°C
- . Applicable wire: # 20AWG ~ # 28AWG


UNIT: INCH
MM

MECHANICAL CHARACTERISTICS:

- . Contact Resistance Force: 341 g. Maximum
- . Contact Separation Force: 20 g. Minimum

FINISHES:

- . Contact: Gold Flash ,10,15,30,50u"

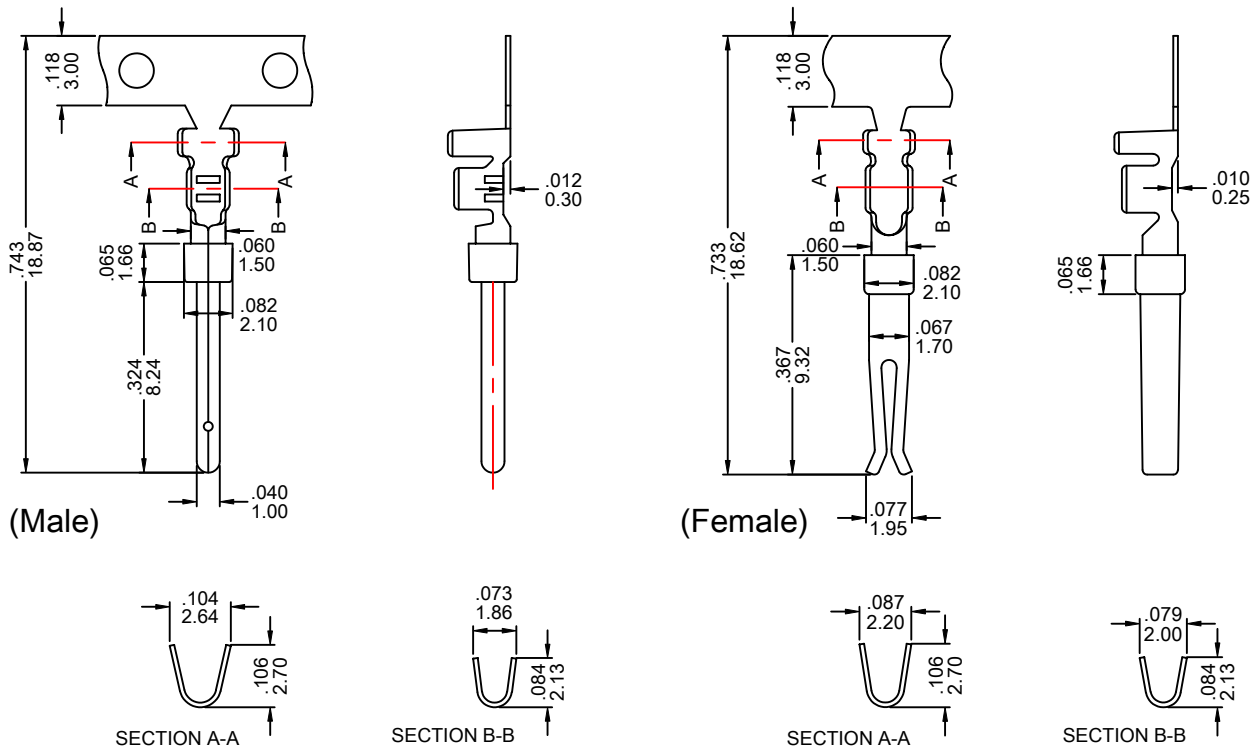

Ordering Information DT Series

Series No.	Contact Type	Contacts Plating	Wire A.W.G.	
DT	F	S1	26	PB
DT Series	F: Female M: Male	S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold	26: 24AWG~28AWG 20: 20AWG~26AWG	RoHs